



230<sub>VAC</sub>

# BULL5M



## RESIDENTIAL USE

with integrated control unit and receiver  
personalised release key

64

up to 500 kg



## CONTROL UNITS:

BULL5M ——— CP.CORE

# BENINCA

100%  
Made in Italy






## 230 Vac

- Electromechanical 230 Vac geared motor with built-in control unit
- Optional encoder connection using MAG.E accessory
- The encoder device ensures crush prevention and precision in the gate moving phases
- Metal release lever
- Magnetic limit switches accessory available (MLS)



Raised foundation plate included. Height 34 mm. Floor fixing distance 353x117 mm, no. 4 Ø 11 mm, motor fixing distance 300x75 mm n.4 M8.

www.beninca.com

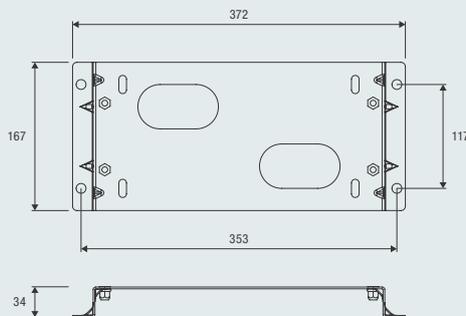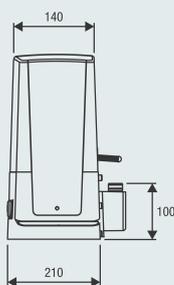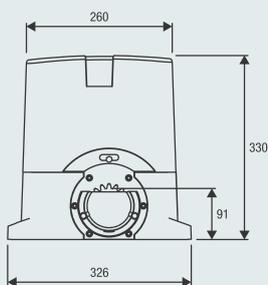

BENINCA

### COMPLETE KITS



MOTOR  
1x BULL5M



PHOTOCELLS  
1x PUPILLA.R



FLASHING LIGHT  
1x LAMPI.LED



SELECTOR  
1x TOKEY



TRANSMITTER  
1x TO.GO2VA

KBULL5M



**RI.M4F**

M4 rack, to weld or attach with screws, 30x12x1000 mm slotted and galvanised. Supplied with M6 metric screws and threaded spacers.  
**Package of 4 pcs.**



**RI.M4Z**

M4 galvanised rack to weld 22x22x2000 mm.  
**Package of 2 pcs.**



**RI.M4ZF**

Galvanised slotted M4 rack 22x22x2010 mm for fastening to the side with the teeth. Supplied with M6 screws.  
**Package of 1 pc.**



**RI.M4P**

Nylon rack with steel core, to attach with screws, M4, 28x40x1000 mm. Slotted, provided with self-drilling screws.  
**Package of 10 pcs.**



**BULL.P3**

Raised foundation plate. Height 34 mm. Floor fixing distance 260x117 mm, no. 4 Ø 11 mm, motor fixing distance 300x75 mm n.4 M8.



**SB.BULL8.F**

Externally fitted anti-intrusion cable unlock device (L=4.5m).



**MAG.E**

Magnetic sensor device to detect obstacles and manage deceleration.



**MLS**

Magnetic limit switches. Suitable for snowy places.



**ID.TA**

Warning board.



**IRI.TX4VA**

4-channel transmitter with Advanced Rolling Code and Rolling Code.



**IRI.TX4AK**

4-channel transmitter with Advanced Rolling Code and Fixed Code.



**IRI.LAMP**

White full range flashing light, 20-255 VAC with built-in aerial.



**IRI.KPAD**

Battery operated wireless vandal-proof digital keypad with alert buzzer and backlit buttons. Triple coding: Rolling Code, Programmable Code and Advanced Rolling Code. 254 memorisable codes.



**IRI.CELL**

Pair of vandal-proof metal covers for PUPILLA/PUPILLA.R photocells, comprising front and rear shells with concealed screw. They can maintain perfect orientation over 180°.



**PUPILLA**

Pair of photocells adjustable to 180°. Option to synchronise up to 4 pairs, 24 VAC/DC power supply. Easy adjustment through a LED that signals optimal alignment. Compact size: 36x110x35 mm



**DA.2S**

Electronic board that allows synchronised movement of 2 automation devices (opposed sliding gates).

**AUTOMATISMI BENINCÀ SpA** • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

TECHNICAL DATA	BULL5M*
Power supply	230 Vac (50-60Hz)
Motor supply	230 Vac
Max absorbed current	1.3 A
Max Thrust	650 N
Opening speed	10.5 m/min
Duty cycle	30%
Protection level	IP44
Operating temperature	-20°C /+50°C
Max gate weight	500 kg
Driving gear for rack	M4 Z18
Weight	11.3 kg
Items no. per pallet	40
Kit weight	12.1 kg
Kits no. per pallet	40

\* Available in 115 VAC version