



# CORE



**100%**  
Made in Italy



### APPLICATION

1 actuator for sliding or 1 swing gate

### CONTROL UNIT POWER SUPPLY


230 Vac

### MOTORS POWER SUPPLY

230 Vac 750W

### MAIN FUNCTIONS

Parameter and operation logic regulations through trimmers and dip-switches | Integrated 433.92 MHz 64-code radio receiver with 3 encoding systems (Advanced Rolling Code, Rolling Code, Fixed Code) | Removable terminal boards | Automatic, semi-automatic and deadman's logic | Encoder (MAG.E) input for detecting obstacles | Motor limit switch inputs | Step by step, stop and photocell inputs | Step by step input configurable as open | Stop input configurable as close or pedestrian | Photocell input programmable as active in opening-closing and in closing phases | Output as gate open indicator | Autosetting of operation and slow-down parameters | Adjustable slow-downs | Electronic torque adjustment for motor on 5 levels | Possibility to manage radio transmitters memorised on integrated receiver with Advantouch system

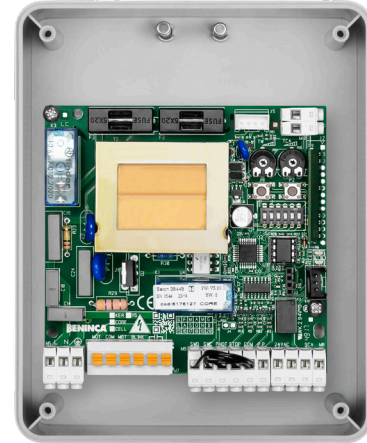

#### E.LOCK

230 Vac vertical electric lock, supplied with counterplate.



#### E.LOCKSE

Extended cylinder for E.LOCK electric lock. It allows unlocking gates up to 55mm-thick from the outside.



#### DA.2S

Electronic board that allows synchronised movement of 2 automation devices (opposed sliding gates).

**AUTOMATISMI BENINCA SpA** • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

